




Javan Pardazesh SIP Loudspeakers

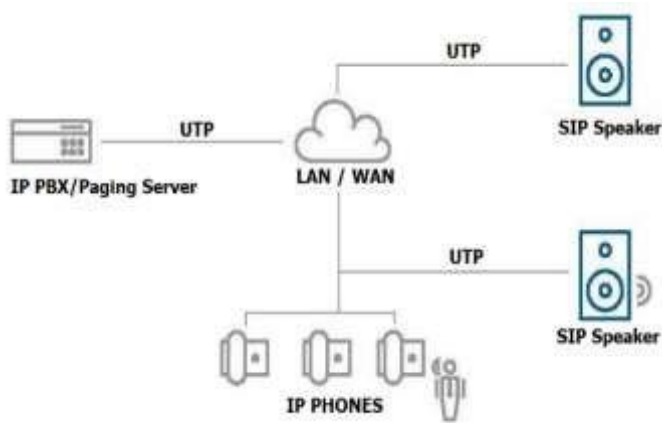

Live and pre-recorded announcements

Broadcast live or pre-recorded announcements. Not only from an IP phone or SIP microphone console but when using an IP PBX, even from your mobile phone.

Scheduled announcements

These innovative loudspeakers also have the functionality for advanced scheduling. You can thus easily prepare a schedule of reporting, separately for each zone.

Built-in Powerful amplifier

These Loudspeakers have built-in powerful amplifier rated at one of 5-50W “depended



Model	JP CSS5/10/30	JP WSS25/15/10	JP WSS50/30	JPDS15 JPDS30
Audio parameters				
Output	5/10/30W PoE	25/15/10W PoE	30/50W PoE	15/25W PoE
Sound pressure	109.2dB	110-124db	110-124db	110-124db
Impedance	8 Ohm	8 Ohm	8 Ohm	8 Ohm
Frequency range	75Hz – 20KHz	275Hz ~ 12kHz	400Hz ~ 7,5kHz	400Hz ~ 7,5kHz
Harmonic distortion	0,05 % @ 1 kHz	0,05 % @ 1 kHz	0,05 % @ 1 kHz	0,05 % @ 1 kHz
Signal-to-noise ratio	91 dB	91 dB	91 dB	91 dB
Audio codecs	G.711 , G.729, G.722	G.711 , G.729, G.722	G.711 , G.729, G.722	G.711 , G.729, G.722
Mechanical properties				
Dimensions (h/w/d)	228 x 184 x 60mm	450 x 120 x 80mm 350 x 120 x 80mm 250 x 120 x 80mm	455 x 270 x 270mm	450 x 120 x 80mm 350 x 120 x 80mm
Weight	1,3kg	2.8kg	2.9kg	2.5kg
Power supply	PoE IEEE	PoE IEEE	PoE IEEE	PoE IEEE
LAN connection	10/100BASE-TX	10/100BASE-TX	10/100BASE-TX	10/100BASE-TX